

RenewWrap™ ESR GF400 BD

Bi-Directional (0/90) E-Glass Fiber Reinforcing Fabric




BRIDGES + ROADWAYS



BUILDINGS + PARKING FACILITIES



OIL, GAS + INDUSTRIAL

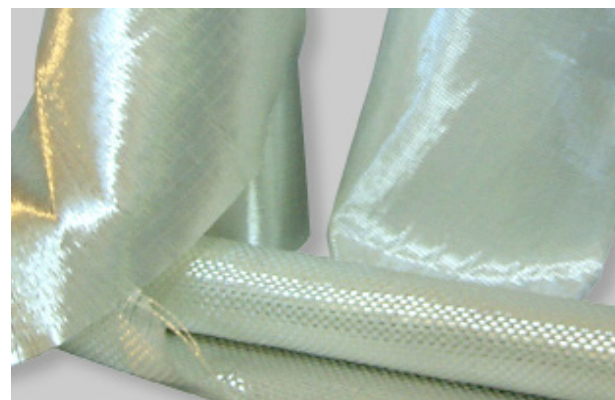

RenewWrap™ GF400 BD is a dry, bi-directional (0/90) reinforcing fabric made with high strength, E-Glass fibers.

Benefits

- Lightweight, flexible, high-strength fabric can be wrapped around and externally bonded to structural elements
- Bi-directional (0/90) fabric provides strength and stiffness in both directions
Non-corrosive

Limitations

- Design calculations shall be made and sealed by a licensed, independent engineer knowledgeable with the design of FRP strengthening systems.
- E-glass fabrics are intended for applications where additional protection or light confinement is required. E-glass is typically not suitable for projects requiring strengthening. For these applications, consider using one of the RenewWrap™ carbon fiber systems.
- Avoid completely encapsulating/covering concrete or masonry members subject to freeze/thaw or moisture vapor transmission.
- Ambient temperature cure wet lay-up FRP strengthening systems are not suitable for applications requiring substantial strengthening and a structural fire rating. For these applications, consider using the **FireStrong™ FRP Strengthening System**.

Packaging

Available in 25 in. (635 mm) widths and 279 ft. (85 m) long rolls suspended in boxes. Each roll yields 580 ft² (54 m²) of material.

Typical Uses

RenewWrap™ E-glass fiber systems may be used to provide additional protection, strength, or stability to existing concrete and masonry structural members including columns, beams, slabs, walls, pipes, tunnels, deck, piers, piles, etc.

- Additional protection from environmental conditions
- Confinement of repaired elements
- Insulation barrier between exposed steel and carbon fiber
- Seismic retrofit and strengthening of masonry elements

Storage & Shelf Life

Store E-glass fiber reinforcing fabric in plastic wrap in box in a clean, dry environment at 50-90 °F (10-30 °C). Shelf life is 10 years in unopened packaging.

Caution

RenewWrap E-glass fabrics are non-reactive. Wear appropriate PPE and use caution when handling. SDS are available and should be consulted for additional information.

Before using any ClockSpring|NRI product, the user must review the most recent version of the product's technical data sheet, material safety data sheet and other applicable documents, available at www.cs-nri.com or by calling 281-590-8491. ClockSpring|NRI is a licensed trademark of NCF industries, Inc.

www.cs-nri.com
281-590-8491



RenewWrap™ ESR GF400 BD

Bi-Directional (0/90) E-Glass Fiber Reinforcing Fabric

 BRIDGES + ROADWAYS

 BUILDINGS + PARKING FACILITIES

 OIL, GAS + INDUSTRIAL

Typical Fabric and Fiber Properties¹

PROPERTY	VALUE
Fiber Type	E-Glass
Color	White
Fabric Construction	Bi-Directional (0°/90°)
Fiber Tensile Strength	500 ksi (3450 MPa)
Fiber Tensile Modulus	11,700 ksi (80 GPa)
Fiber Rupture Strain	4.0%
Fabric Areal Weight ²	11.8 oz./yd ² (400 gsm)

NOTES:

1. Fiber properties are typical values of the fibers used in the manufacture of the reinforcing fabrics. Fiber properties shall not be used for design. They are reported here to provide the designer with a general understanding of the grade of fibers used in the reinforcing fabrics.
2. Reported value represents the minimum fabric areal weight.

Physical Properties

PROPERTY	VALUE	TEST METHOD
Nominal Thickness ¹	0.021 inch (0.53 mm)	
Glass Transition Temperature ²	140 °F (60 °C)	ASTM E1640

Mechanical Properties

PROPERTY	0° DIRECTION	90° DIRECTION	TEST METHOD
Tensile Strength	45 ksi (310 MPa)	46 ksi (320 MPa)	ASTM D3039
Tensile Modulus of Elasticity ²	1800 ksi (12.4 GPa)	1740 ksi (12.0 GPa)	ASTM D3039
Elongation at Break	2.56%	3.02%	ASTM D3039
Tensile Strength/Unit Width	0.95 kip/in./ply (0.17 kN/mm/ply)	0.97 kip/in./ply (0.17 kN/mm/ply)	ASTM D7565
Tensile Modulus/Unit Width ³	38 kip/in./ply (6.6 kN/mm/ply)	36 kip/in./ply (6.2 kN/mm/ply)	ASTM D7565

NOTES:

1. The reported thickness is based on measurements made on panels prepared in the laboratory. Based on experience the typical thickness of a single ply (fibers + saturant), impregnated with **RenewWrap™ ESR Saturant** is approximately 0.03-0.04 inch depending on how the fabric is impregnated in the field. Actual thicknesses measured in the field may vary slightly. As with any FRP strengthening system, the strength/unit width and modulus/unit width should be used for design and for field QC purposes.
2. Modulus of elasticity and unit stiffness are reported as average values in accordance with ACI 440.2R and shall be used for design. They shall not be used for accepting/rejecting results of field QC test results.
3. Test samples are conditioned for 48 hours at 140 °F (60 °C). Tg values based on long term curing at room temperature conditions. Higher Tg values may be obtained by post-curing. Contact ClockSpring|NRI for more information.

Before using any ClockSpring|NRI product, the user must review the most recent version of the product's technical data sheet, material safety data sheet and other applicable documents, available at www.cs-nri.com or by calling 281-590-8491. ClockSpring|NRI is a licensed trademark of NCF industries, Inc.

www.cs-nri.com
281-590-8491

